



# Zip Celsius Plus All-in-One Pull Out

**FILTERED:** **BOILING** **CHILLED** **SPARKLING**  
**UNFILTERED:** **HOT & COLD**

The world's first residential All-in-One tap with the convenience of five water types, and a unique integrated hose system, delivering a snag-proof pull-out sprayer. The intuitive touch-pad with antimicrobial protection operates the filtered drinking water, while the lever dispenses unfiltered hot and cold water.

Beautifully engineered to deliver water at its best.



Actual product may vary slightly depending on functionality.  
 The image shown is a representation only.

## STANDARD



## PLATINUM



MODEL	MIXED HOT AND COLD	FILTRATION 0.2 MICRON	FONT	CO <sub>2</sub>	NOMINAL POWER RATING KW	COMMAND CENTRE DIMENSIONS W X D X H
H5X783Z03UK	Y	Y	N	Y	1.7 kW @ 230V AC	339mm x 483mm x 333mm

For details of the alternative tap finishes and accessories please see the 'Accessories' section

## Features and benefits

### Advanced filtration

Maintains existing protective levels of chlorine whilst removing sediment and cysts. This level of filtration includes the removal of dirt, lead, microplastics & 99.9% of microbiological cysts.

### Environmentally conscious operation

The HydroTap boasts a range of eco-friendly functionalities, including water conserving air cooling technology, the use of zero-impact refrigerant gas R290 and energy saving sleep modes.

### Unique user-safety options

The Zip HydroTap is designed with safety in mind, with boiling isolation, cool touch tap and safety lock features. The boiling point is factory set to 98 degrees celsius, to avoid spluttering steam.

### Enhanced hygiene

The 5th generation HydroTap command centre has SteriTouch® embedded throughout the water path. This reduces surface bacteria by 99.99% providing extra protection.

### Five year warranty

This system is covered by a comprehensive full parts and labour warranty for 36 months, with an additional 24 months boiling tank cover.

## Product detail

### Specification type

Product code	H5X783Z03UK
Product name	HydroTap G5 Celsius Plus All In One Pull Out Boiling Chilled Sparkling Matt Black for home

### Capacity, weights & dimensions

Water functions	Boiling, Chilled, Sparkling
Unit dimension (W x D x H)	339mm x 483mm x 333mm
Product weight - empty / full	30kg / 35kg

### Plumbing

Wholesome water inlet supply required	Hot & Cold Feed
Supply pressure range	2.5bar - 5bar
Supply connection (hot & cold)	1 x isolated 1/2" BSP BSP fitting (flexible supply hoses included)
Installation	Must comply with current water supply regulations

The minimum water pressure will vary if a limescale filter is installed. Please contact us to discuss your requirements.

**Suitable drainage to trapped waste within 1 metre required for both on font and sink installations.**

### Electrical

Command centre power rating	1.7 kW @ 230V AC
Voltage supply	13 amp amps
Power supply requirements	1 x 13amp socket outlet
Cable length	1.8m fitted with UK standard 3-pin plug
Installation	Must comply with current IEE regulations

## Tap design


Style	Celsius Plus All-in-One Pull Out
Finish	Matt Black
Installation hole cut size	50mm
Rotation	180 degree
Disability options	No
Country of Origin	Australia

## Command centre

Factory temperature boiling	98°C
Factory temperature chilled	3-5°C
Filtration	0.2 Micron Filter Cartridge
Flow rate (Boiling)	4 l/min
Wholesome water supply requirements	Hot & Cold Feed
Refrigerant	R290
Tank material	PPS
Country of origin	Australia

## Tap installation

ALL-IN-ONE CELSIUS PLUS PULL-OUT

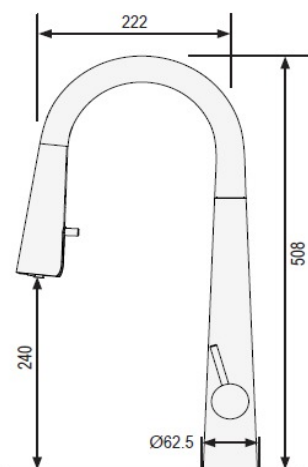

## Under-counter unit installation

Clearance space required  
for under counter unit

