

Product Finish: Antique Brass

Product code: AT2240  
EAN13 barcode: 5060879994645



## Product features:

Traditional French provincial styling

Flow Limited to 5 Litres per Minute for Part G compliance

1.5M pull out nylon sprayhead hose

Single spray pattern showerhead


Connects to any water supply, works independently of the tap

## Additional information / Parts included:

SCO0616400000 Fixing kit

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

## Product dimensions:

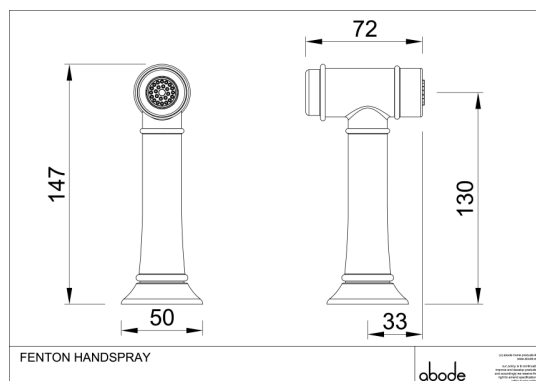

• Overall, Height / projection: 147 mm

• Exit reach: 33 mm

• Exit height: 130 mm

• Centre distance(s):

• Base diameter(s): 50 mm

• Recommended hole diameter: Ø 35 mm

• Max. surface depth: 50 mm

• Spout diameter: 30 mm

• Spout aerator size: M24 x 1

## Packaged properties:

Box length: 330mm

Box depth: 70mm


Box width: 130mm

Units per outer: 10

Tap only weight: 0.70kg

Boxed weight: 0.99kg

## Product flow characteristics:

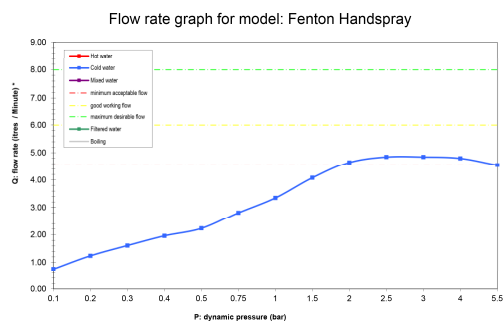

• Min / Max water pressure: 1.50 / 5 bar

• Recommended / Max water temperature: 46°C / 70°C

• Part G - Mixed flow rate at 3 bar (litres / min): 04.85

• Control valve type: On - Off Cartridge

• Product flow characteristics: Single flow

• Non return valve(s): Yes, located in handpray body

• Aerator type: Spray 5lpm

• Accepts revolve / spray areator: No

• Spout connection method: N/A

• Tail pipe inlet / outlet size: N/A / N/A

• Inlet pipe type / length: N/A / N/A mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year