PERRIN & ROWE®

LONDON



SPECIFICATIONS

DESCRIPTION


- High quality nano filtration technology with limescale reduction
- Anti-scald lock
- Minimal heat loss
- Open vented system
- Digital temperature control accurate to 0.5°C
- Multiple pre-set temperatures ranging from 75°C to 98°C

FLOW

- Recommended working pressure 0.5 bar/7.5PSI
- Maximum 5 bar/ 75 PSI
- 4L /min at 1 bar
- 8L/min at 3 bar


WARRANTY

· www.perrinandrowe.co.uk



Mini Instant Hot Tap with Filtration

MODELS: 1833

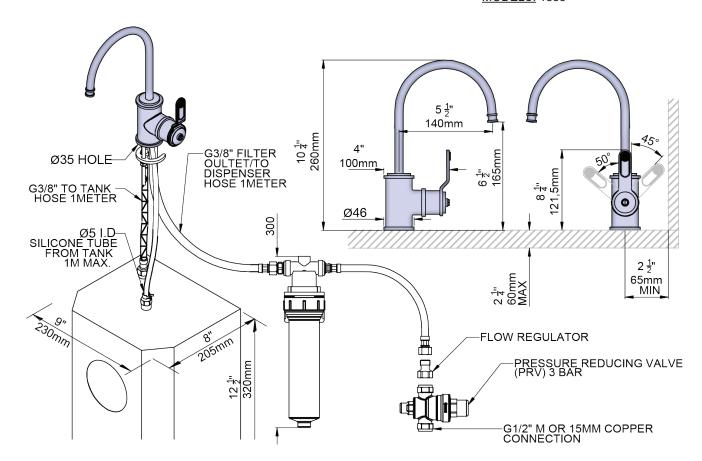

+44 (0) 1708 526 361

www.perrinandrowe.co.uk