

## SPECIFICATIONS

## DESCRIPTION


- Flexible connectors for easier installation
- Supplied with 15mm double check valves

## FLOW

- Recommended working pressure 0.5 bar/7.5PSI
- Maximum 5 bar/ 75 PSI
- 12L /min at 1 bar
- 20L /min at 3 bar


## WARRANTY

- [www.perrinandrowe.co.uk](http://www.perrinandrowe.co.uk)

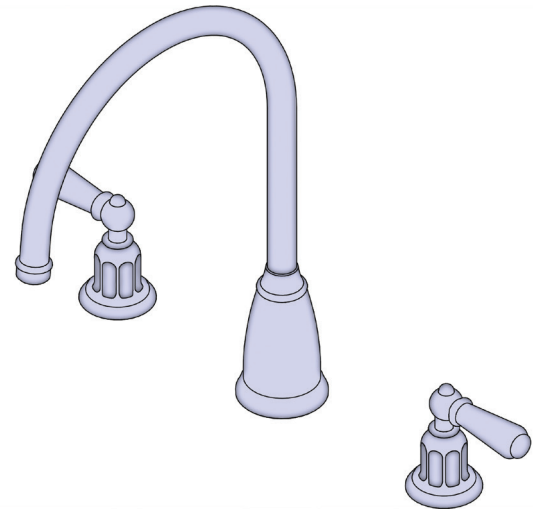

## Widespread Sink Mixer

MODELS: 4371

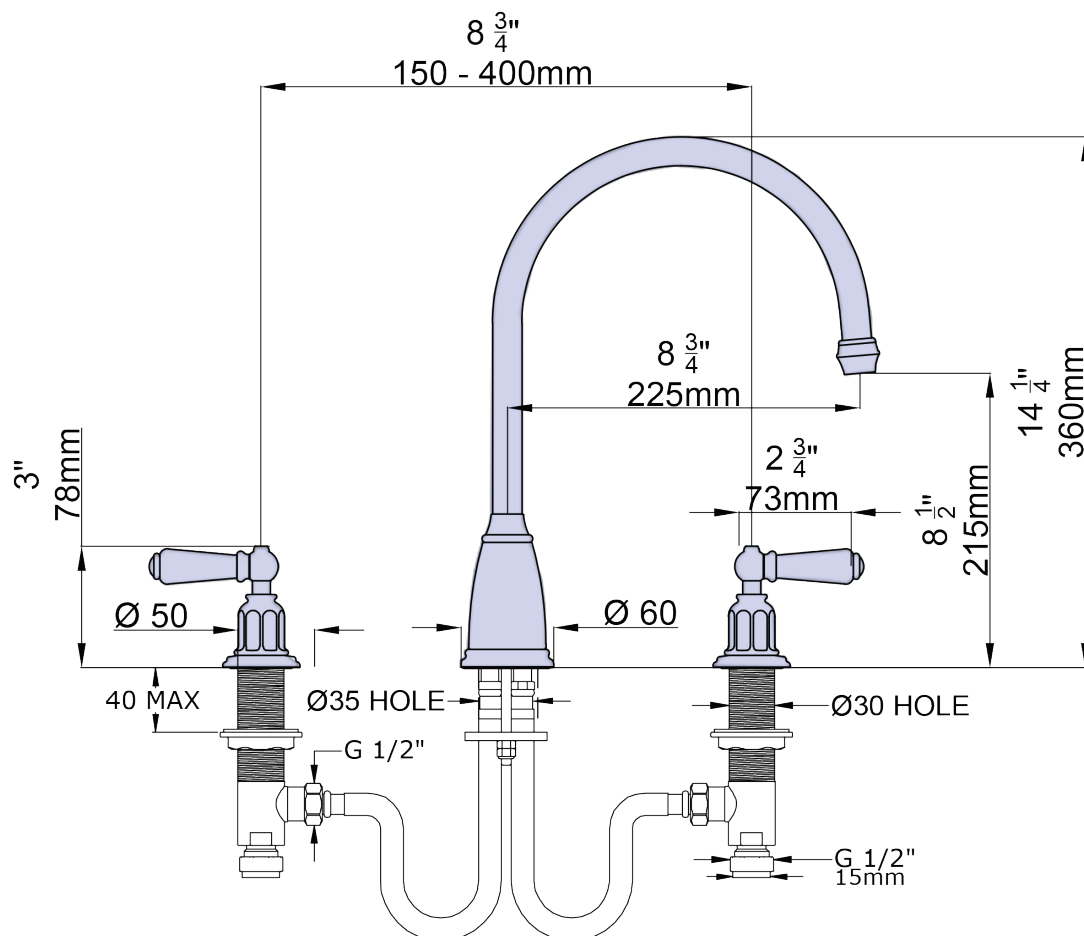

**+44 (0) 1708 526 361**

**www.perrinandrowe.co.uk**

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL