

# Bayenne Single Lever

**Product Finish:** Century Copper

**Product code:** AT3087

**EAN13 barcode:** 5060344155342



## Product features:

- Low lead brass construction
- Single lever control for effortless single handed control
- French provincial design aesthetic
- Antislash spout supplied as standard
- 5 year limited warranty

## Additional information / Parts included:

Triangular stabiliser

## Packaged properties:


**Box length (mm):** 605 **Box depth (mm):** 85

**Box width (mm):** 320 **Units per outer:** 5

**Tap only weight (kg):** 3.04


**Boxed weight (kg):** 3.84

## Product dimensions:

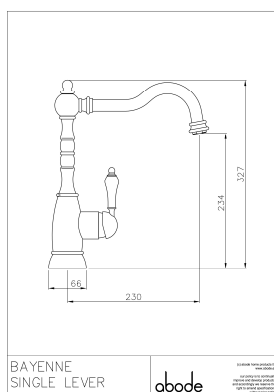

- **Overall Height / projection (mm):** 327
- **Exit reach (mm):** 230
- **Exit height (mm):** 234
- **Centre distance(s):** N/A
- **Base diameter(s) (mm):** 66
- **Recommended hole diameter (mm):** Ø 35
- **Max. surface depth (mm):** 60
- **Spout diameter (mm):** 20
- **Spout aerator size:** M24

## Product flow characteristics:

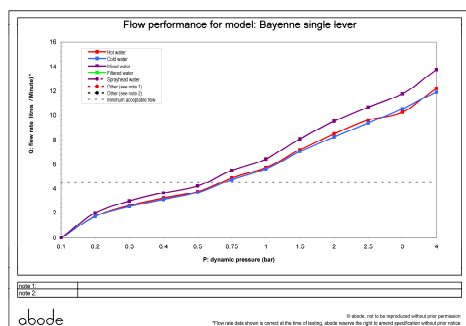

- **Min / Max water pressure (bar):** 0.50 / 5.5
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 11.77

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non-return/Check valve(s):** Integral to H & C inlets
- **Aerator type:** Neoperl honeycomb light blue
- **Accepts revolve / spray aerator:** No
- **Spout connection method:** Locking collar

- **Tail pipe inlet / outlet size:** 1/2" BSP Male / M10
- **Inlet pipe type / length (mm):** flexible stainless braided hose / 480

## Care instructions summary:

.Clean the product regularly using a mild washing up liquid, do not use any other cleaners.  
 .Regular cleaning will prevent the build up of lime scale and dirt  
 .After cleaning rinse thoroughly with clean water to remove any cleaner residue  
 .Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

.Materials and workmanship defects warranted for 5 years  
 .Valves and working parts warranted for 5 years  
 .Surface warranty defects warranted for 1 years  
 .O-rings, hoses & gaskets warranted for 1 years

abode