abode

Tubist Single Lever Pull Out

Product Finish:	Brushed Nickel	Product code:	AT2130
		EAN13 barcode:	5060344158701

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product features:

Metal construction throughout

Supplied compete with flexible tail pipes for fast simple fitting

Single lever control for effortless single handed control

Antisplash spout supplied as standard

Pull out hose spout head

Additional information / Parts included:

Product dimensions:

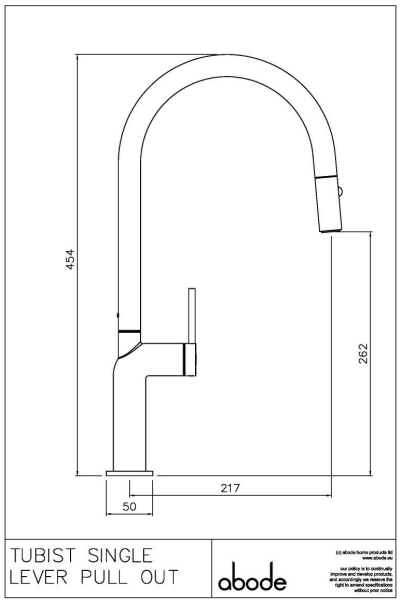

- **Overall Height / projection:** 454 mm
- **Exit reach:** 217 mm
- **Exit height:** 262 mm
- **Centre distance(s):**

- **Base diameter(s):** 50 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 50 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** M22

Packaged properties:

Box length: 570mm	**Box depth:** 75mm
Box width: 355mm	**Units per outer:** 5
Tap only weight: 1.38kg	**Boxed weight:** 3.06kg

Product flow characteristics:

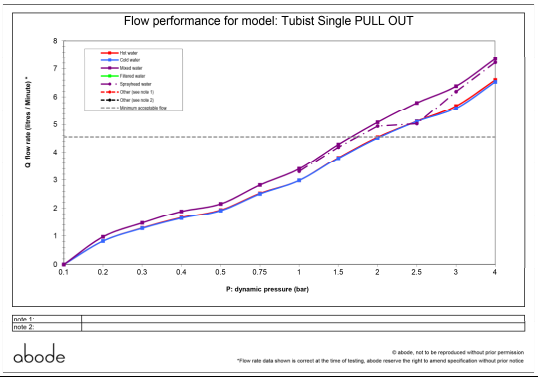

- **Min / Max water pressure:** 1.75 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 06.38

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Integral to hot & cold inlets

- **Aerator type:** Amfag aerator dual jet
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw (2.5mm)

- **Tail pipe inlet / outlet size:** M8 / 1/2" BSP Male
- **Inlet pipe type / length:** Flexible stainless braided hose / 365 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year