

Product Finish: Chrome

Product code: AT2156
EAN13 barcode: 5060344159692




Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product features:

- Supplied complete with flexible tail pipes for fast simple fitting
- Single lever control for effortless single handed control
- Additional jet spray function
- Minimalist planate design form
- Urban industrial styling

Additional information / Parts included:

Product dimensions:

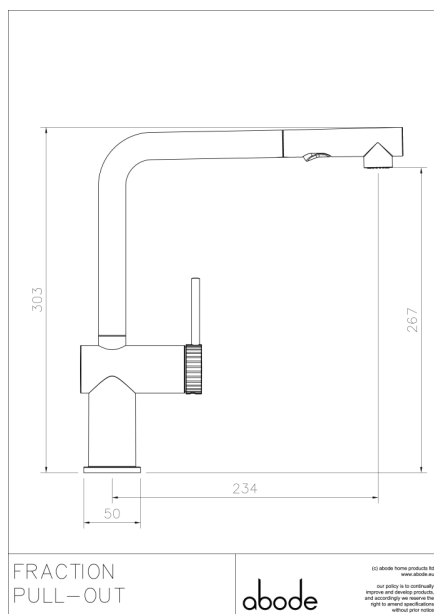


- Overall Height / projection:** 303 mm
- Exit reach:** 234 mm
- Exit height:** 267 mm
- Centre distance(s):**
- Base diameter(s):** 50 mm
- Recommended hole diameter:** Ø 35 mm
- Max. surface depth:** 40 mm
- Spout diameter:** 24 mm
- Spout aerator size:** M20x1 female

Packaged properties:

- Box length:** 435mm
- Box depth:** 70mm
- Box width:** 340mm
- Units per outer:** 5
- Tap only weight:** 1.53kg
- Boxed weight:** 2.10kg

Product flow characteristics:

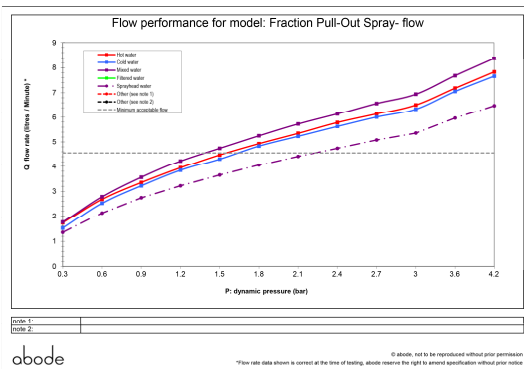

- Min / Max water pressure:** 1.50 / 5.5 bar
- Recommended / Max water temperature:** 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min):** 06.94
- Control valve type:** Single lever ceramic cartridge
- Product flow characteristics:** Single flow
- Non return valve(s):** Integral to sprayhead and Cold inlet
- Aerator type:** Honeycomb Aerator + spray (dual jet)
- Accepts revolve / spray areator:** No
- Spout connection method:** Grub screw
- Tail pipe inlet / outlet size:** M8 / 1/2" Male (Hot), 1/2" Female (Cold)
- Inlet pipe type / length:** flexible stainless braided hose / tbc mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year