

iQ300, Telescopic cooker hood, 90 cm, Silver metallic LI94MA531B

A



Optional accessories

LZ49850
LZ45510
LZ45450

For clean lines the powerful telescopic cooker hood disappears into an upper cabinet, perfect for modern kitchens.

- ✓ The quiet high-performance motor: ensures efficient odour and steam removal.
- ✓ LED lights: for optimal visibility and ambience while cooking.
- ✓ Fast-acting extraction for sudden bursts of steam - Intensive Setting

Features

Technical Data

Typology : Pull-out
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 175
Required niche size for installation (HxWxD) : 162mm x 526.0mm x 290mm
Minimum distance above an electric hob : 430
Minimum distance above a gas hob : 650
Net weight (kg) : 10.566
Type of control : Electronic
Maximum output air extraction (m³/h) : 266
Boost position output recirculating (m³/h) : 178.0
Maximum output recirculating air (m³/h) : 166
Boost position air extraction (m³/h) : 412
Number of lights (Stck) : 3
Noise level (dB(A) re 1 pW) : 63
Diameter of air outlet (mm) : 120 / 150
Grease filter material : Washable aluminium
EAN code : 4242003880234
Connection rating (W) : 76
Current (A) : 10
Voltage (V) : 220-240
Frequency (Hz) : 50; 60
Plug type : GB plug
Installation type : Built-in



4 242003 880234

iQ300, Telescopic cooker hood, 90 cm, Silver metallic LI94MA531B

Features

Features

- Soft touch button control with Electronic display
- 3 x power levels plus intensive setting
- 3 x 1,5W LED
- Efficient BLDC motor
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 minutes))
- 3 x metal grease filter cassettes - dishwasher safe

Design

- 90 cm wide
- Silver metallic lacquer
- Handle strip specification: stainless steel with logo
-
- Filter cover stainless steel, perforated and dishwasher safe

Performance

- Suitable for ducted and re-circulating operation
- For recirculated extraction recirculating kit (accessory) needed
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 266 m³/h
- Intensive 412 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 63 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 63 dB(A) re 1 pW
- Intensive: 70 dB(A) re 1 pW
- Colour Temperature: 3500 K
- Light Intensity: 355 lux
- Power rating: 76 W
- Average Energy Consumption: 22.2 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*




Planning and installation information

- Dimensions (HxWxD): 203 x 898 x 290 mm
- Built-in dimensions (HxWxD): 162 x 526 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

* In accordance with the EU-Regulation No 65/2014


iQ300, Telescopic cooker hood, 90 cm, Silver metallic LI94MA531B

Dimensioned drawings

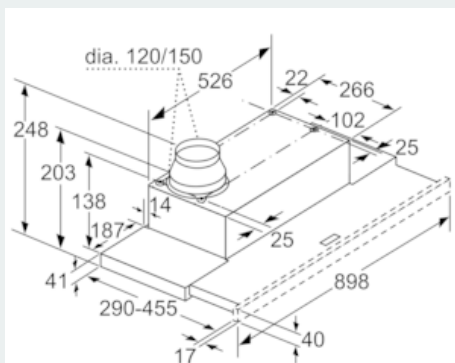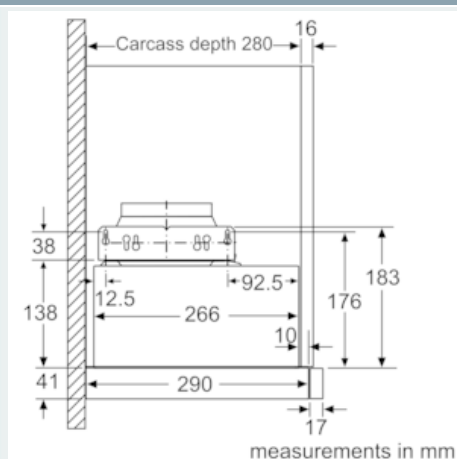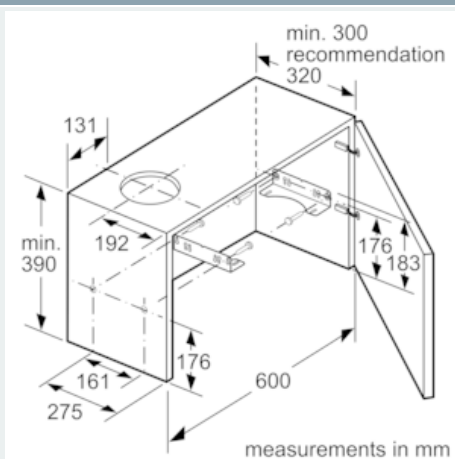


Depth of the filter drawer can be adjusted by up to 29 mm

measurements in mm

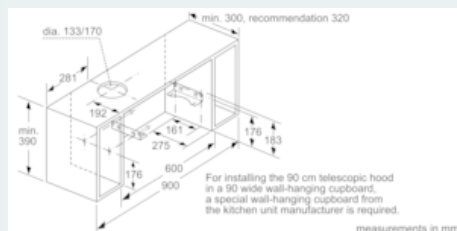


For installing the 90 cm telescopic hood in a 90 wide wall-hanging cupboard, a special wall-hanging cupboard from the kitchen unit manufacturer is required.

measurements in mm

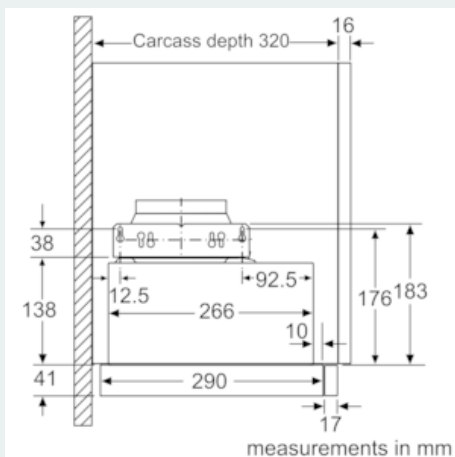

measurements in mm

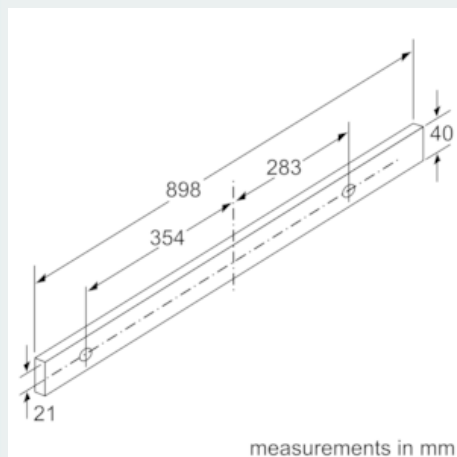

measurements in mm

**iQ300, Telescopic cooker hood, 90 cm,
Silver metallic
LI94MA531B**

Dimensioned drawings

