

iQ500, Telescopic cooker hood, 90 cm, Stainless steel LI97SA561B

B



For clean lines the powerful telescopic cooker hood disappears into an upper cabinet, perfect for modern kitchens.

- ✓ The quiet high-performance motor: ensures efficient odour and steam removal.
- ✓ LED lights: for optimal visibility and ambience while cooking.
- ✓ Calm the cooking process -#Extremely quiet
- ✓ Fast-acting extraction for sudden bursts of steam - Intensive Setting

Features

Technical Data

Typology : Pull-out

Approval certificates : CE, VDE

Length of electrical supply cord (cm) : 175

Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm

Minimum distance above an electric hob : 430

Minimum distance above a gas hob : 650

Net weight (kg) : 15.077

Type of control : Electronic

Number of speed settings : 3-stage + 2 intensive

Maximum output air extraction (m³/h) : 395

Boost position output recirculating (m³/h) : 543.0

Maximum output recirculating air (m³/h) : 321

Boost position air extraction (m³/h) : 700

Number of lights (Stck) : 3

Noise level (dB(A) re 1 pW) : 53

Diameter of air outlet (mm) : 120 / 150

Grease filter material : Washable stainless steel

EAN code : 4242003880289

Connection rating (W) : 146

Current (A) : 10

Voltage (V) : 220-240

Frequency (Hz) : 50; 60

Plug type : GB plug

Installation type : Built-in

Optional accessories

LZ49200
LZ45650
LZ45610
LZ11IXC16
LZ11IXB16
LZ11ITD11
LZ10ITP00



iQ500, Telescopic cooker hood, 90 cm, Stainless steel LI97SA561B

Features

Features

- Soft touch button control with 7-segment display
- 3 power levels and 2 intensive settings
- softLight with dimmer function
- 3 x 1,5W LED
- Efficient BLDC motor
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 minutes))
- 3 x metal grease filter cassettes - dishwasher safe
- Grease and charcoal filter saturation indicators

Design

- 90 cm wide
- Stainless Steel
- Handle strip specification: stainless steel with logo
-
- Steel filter cover

Performance

- Suitable for ducted and re-circulating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 395 m³/h
- Intensive 700 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 53 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 53 dB(A) re 1 pW
- Intensive: 69 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode:
- Max. normal use: 358 m³/h
- Intensive: 641 m³/h
- Noise level in recirculation mode:
- Max. normal use: 60 dB(A) re 1 pW
- Intensive: 71 dB(A) re 1 pW
- Colour Temperature: 3500 K
- Light Intensity: 355 lux
- Power rating: 146 W
- Average Energy Consumption: 38.8 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*







Planning and installation information

- Telescopic easy installation
- Dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

* In accordance with the EU-Regulation No 65/2014

iQ500, Telescopic cooker hood, 90 cm, Stainless steel LI97SA561B

Dimensioned drawings

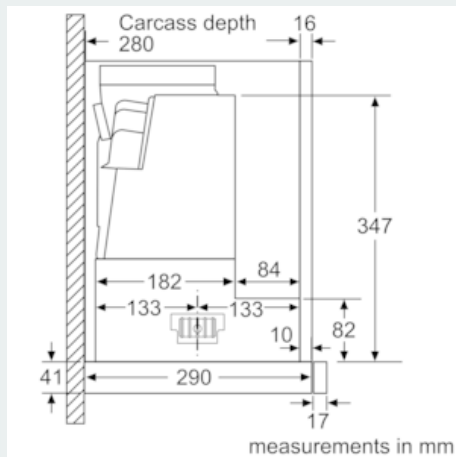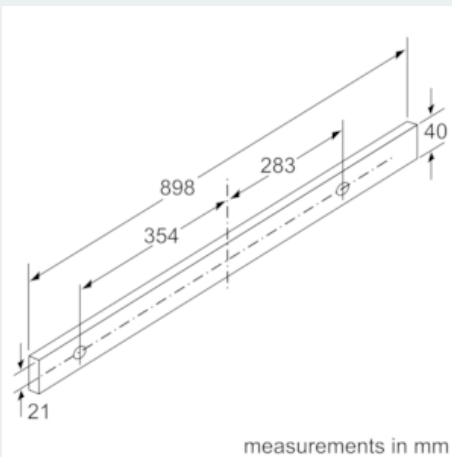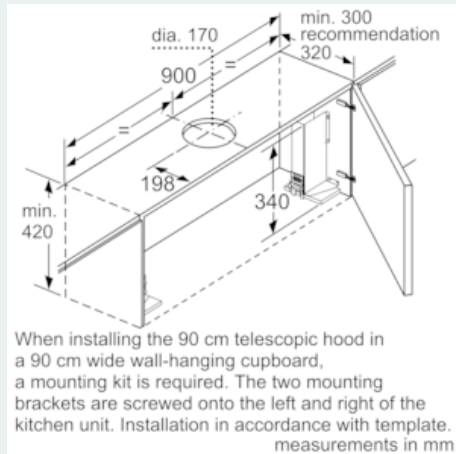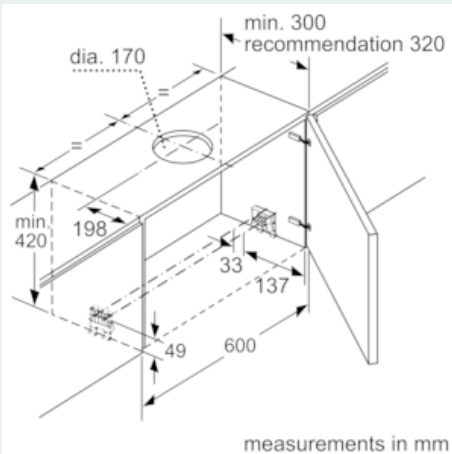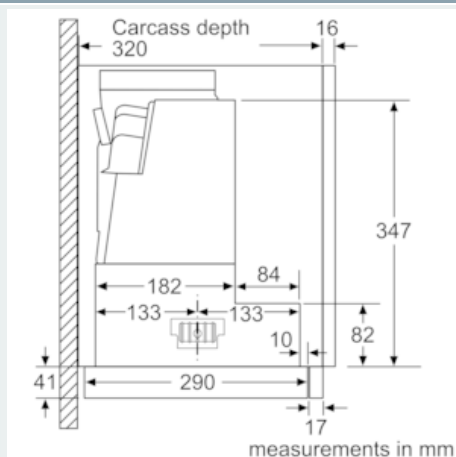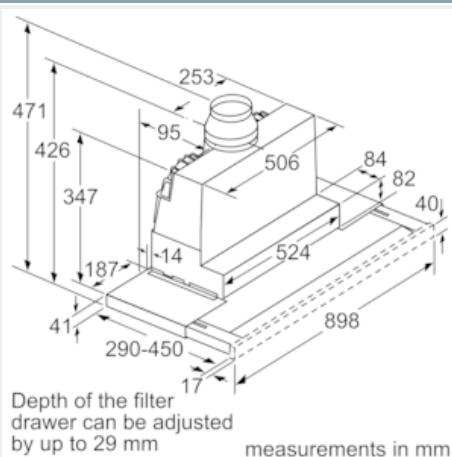

**iQ500, Telescopic cooker hood, 90 cm,
Stainless steel
LI97SA561B**

Dimensioned drawings

