

Product Finish: Brushed Nickel

Product code: AT2227  
EAN13 barcode: 5060879994515



## Product features:

Victorian inspired aesthetic

Quarter turn handle action for precise flow control

Ceramic handle(s) as standard

Flow Limited to 5 Litres per Minute for Part G compliance


Supplied complete with flexible tail pipes for fast simple fitting

## Additional information / Parts included:

Includes additional Honeycomb 1.5gpm, Solid metal handle addition

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

## Product dimensions:

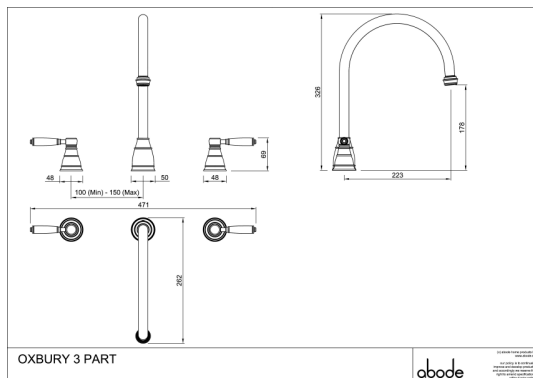

• Overall, Height / projection: 326 mm

• Exit reach: 223 mm

• Exit height: 178 mm

• Centre distance(s):

• Base diameter(s): 48 x 50mm

• Recommended hole diameter: Ø 35 mm

• Max. surface depth: 40 mm

• Spout diameter: 20 mm

• Spout aerator size: M22 x 1

## Packaged properties:

Box length: 575mm

Box depth: 80mm


Box width: 350mm

Units per outer: 5

Tap only weight: 2.13kg

Boxed weight: 3.39kg

## Product flow characteristics:

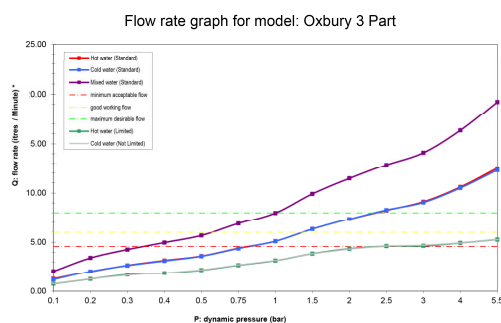

• Min / Max water pressure: 0.40 / 5 bar

• Recommended / Max water temperature: 46°C / 70°C

• Part G - Mixed flow rate at 3 bar (litres / min): 14.10

• Control valve type: Ceramic disc QT

• Product flow characteristics: Single flow

• Non return valve(s): None

• Aerator type: Honeycomb Aerator

• Accepts revolve / spray areator: No

• Spout connection method: Grub screw

• Tail pipe inlet / outlet size: M10 / M8 / 1/2" Female / M8

• Inlet pipe type / length: Flexible stainless braided hose / 365 / 400 mm

### Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

### Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year