


iQ700, Gas hob, 90 cm, Tempered glass, Black
ER9A6SH40

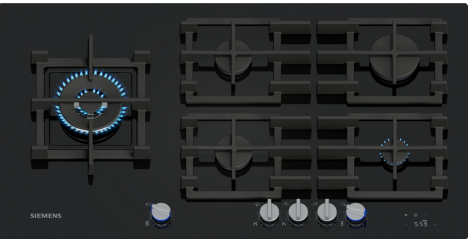

Tempered glass gas hob with stepFlame Technology for precise flame control, intelligent hob-hood-control, detachable dials and semi-continuous pan supports for an easy cleaning.

- ✓ stepFlame Technology: Precise flame control with nine different settings
- ✓ Detachable metallic sword dials: Easily removable for easy cleaning and precise cooking control
- ✓ Illuminated dials: Instantly recognise when burner is on and its power level
- ✓ cookConnect: Control different functions of your hood, like power level or light, directly from your hob with a matching Siemens hood
- ✓ Intelligent hood automatic: The hood is synced to your hob for maximum convenience

Optional accessories

HZ298105	Simmer plate
HZ298107	Wok ring
HZ298114	Small pot support
HZ32WA00	Wireless food thermometer
HZ9SE040	4 pieces Set
HZ9SE060	6 pieces Set

Features

Technical Data

Product name/family: gas hob w
integrated controls
Built-in / Free-standing: Built-in
Source of energy: Gas
Number of cooking zones: 5
Required niche size for installation (HxWxD): 45 x 850-850 x
490-500 mm
Width of the appliance: 915 mm
Dimensions: 54x915x520 mm
Dimensions of the packed product (HxWxD): . 170 x 1110 x 660 mm
Weight: 24.2 kg
Gross weight: 27.6 kg
Residual heat indicator: Separate
Location of control panel: Front
Basic surface material: Tempered glass
Color of surface: Black
Color of frame: Black
Length electrical supply cord: 100 cm
EAN code: 4242003948408
Gas connection rating: 12500 W
Fuse protection: 3 A
Nominal power: 220-240 V
Frequency: 50; 60 Hz



iQ700, Gas hob, 90 cm, Tempered glass, Black ER9A6SH40

Features

Design

- Tempered Glass surface, black
- frameless design: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet
- illuminated full metal

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Electronic power level display: see the selected power level and the residual heat.
- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.
- Acoustic signal: an alarm sounds at the end of the time set (e.g. for pasta).

Burners and power

- 5 burner gas hob including:
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: Wok burner up to 5 KW (depending on gas type)
- Center front: Standard burner up to 1.75 KW (depending on gas type)
- Center rear: standard burner up to 1.75 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Cleaning

- Removable control dials for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.
- Cast iron pan supports with rubber feet: little weight and compact form, yet high stability due to continuous surface.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 5 Burner: indicates which burner parts and pan supports are still hot.

Connectivity

- Home Connect : check if the hob is switched off even when not at home and find additional functions in the Home Connect app.
- cookConnect - hood control (with Wi-Fi enabled hood) : automatically activates the hood when cooking, thanks to the WiFi connection of hob and suitable hood.
- Smart Hood Automatic: hood automatically adapts fan speed thanks to hob continuously providing cooking data (with matching hood and connected Home Connect account).
- Sound volume of touch control adaptable to personal preference and needs (via app).

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)

- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 500)
- Min. worktop thickness: 20 mm
- If installed flush, minimum worktop thickness is 30mm.
- Power cord: 1 m
- Connected load: 12.5 KW

**iQ700, Gas hob, 90 cm, Tempered
glass, Black
ER9A6SH40**

Dimensioned drawings

