
# KA-W34-SSH

Appliance Designation Wine Storage  GTIN 5061068710237  EEI Class F  Rated EEI 124  Noise Level dB(A) 38dB  Noise Class C  Rated annual energy consumption 104kWh/annum  Climate Class SN/T - 16-38  Compressor Inverter compressor  Refrigerant R600A  Fan Assisted Cooling Yes  Ventilation Required Plinth ventilation essential  Temperature Range 5 to 20
Rated EEI 124  Noise Level dB(A) 38dB  Noise Class C  Rated annual energy consumption 104kWh/annum  Climate Class SN/T - 16-38  Compressor Inverter compressor  Refrigerant R600A  Fan Assisted Cooling Yes  Ventilation Required Plinth ventilation essential
Noise Level dB(A)  Noise Class  C  Rated annual energy consumption  Climate Class  SN/T - 16-38  Compressor  Inverter compressor  Refrigerant  R600A  Fan Assisted Cooling  Yes  Ventilation Required  Plinth ventilation essential
Noise Class       C         Rated annual energy consumption       104kWh/annum         Climate Class       SN/T - 16-38         Compressor       Inverter compressor         Refrigerant       R600A         Fan Assisted Cooling       Yes         Ventilation Required       Plinth ventilation essential
Rated annual energy consumption 104kWh/annum  Climate Class SN/T - 16-38  Compressor Inverter compressor  Refrigerant R600A  Fan Assisted Cooling Yes  Ventilation Required Plinth ventilation essential
Climate Class       SN/T - 16-38         Compressor       Inverter compressor         Refrigerant       R600A         Fan Assisted Cooling       Yes         Ventilation Required       Plinth ventilation essential
Compressor     Inverter compressor       Refrigerant     R600A       Fan Assisted Cooling     Yes       Ventilation Required     Plinth ventilation essential
Refrigerant R600A Fan Assisted Cooling Yes Ventilation Required Plinth ventilation essential
Fan Assisted Cooling Yes  Ventilation Required Plinth ventilation essential
Ventilation Required Plinth ventilation essential
·
Temperature Range 5 to 20
0.020
Zone Type 2 zones, 5-20 in both zone
Defrosting Type Automatic
Installation Undercounter
Door Stainless Steel
Door Handle Yes, stainless steel
Door Open Direction RH hinged
Reversible Door Yes
Door-Open Alarm Function Yes
Lock No
Capacity (L) 118L
Standard Storage Quantity 36 Bordeaux or Burgundy bottles (750m
Shelves 4 Telescopic shelves, 1 fixed lower
Shelf Type Treated beech wood
Light Smooth strip LED - 3000k (dimmable)
Auto. Lighting Function Yes
Control LED touch display
Control Display Colour White
Charcoal Filter No
Softclose Yes
Heating Ability Yes
Internal Humidity 55-85% - automatic
Vibration Free Yes
Power Lead Length 1.5m
Adjustable Feet Yes - 70mm
Warranty 3 years P & L


#### Body Dimension / Weight H820 x W597 x D577mm 48kg


### Packing Dimension / Weight H920 x W655 x D665mm 53kg

#### **ENERGY LABEL**

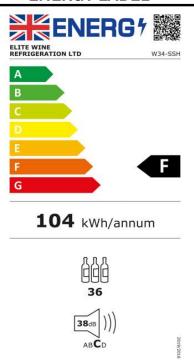


## **BOTTLE LOADING**

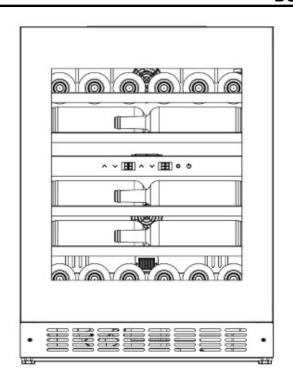

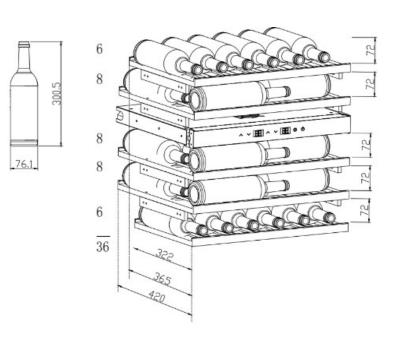











#### PRODUCT DIMENSIONS

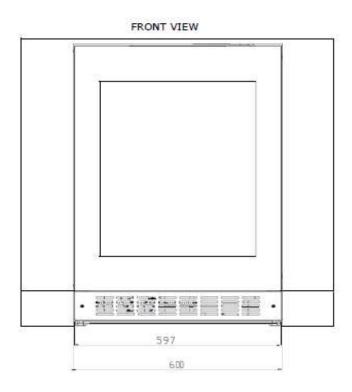

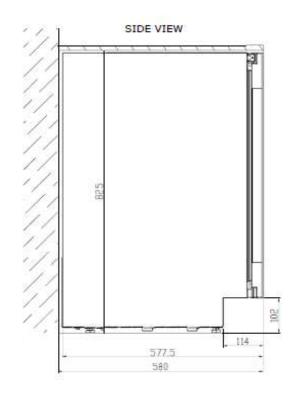

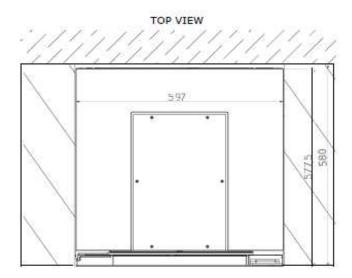

PLEASE NOTE - DIMENSIONS CAN VARY BY +/- 2mm DUE TO MANUFACTURING TOLERANCES, ALL DIMENSIONS ARE GIVEN IN MILLIMETRES (mm)

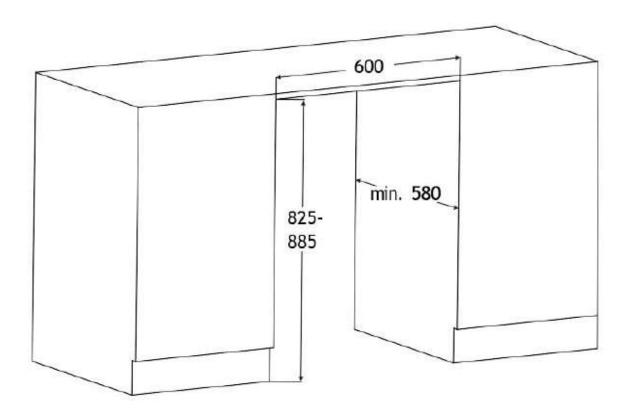

PLEASE NOTE - DIMENSIONS CAN VARY BY +/- 2mm DUE TO MANUFACTURING TOLERANCES, ALL DIMENSIONS ARE GIVEN IN MILLIMETRES (mm)