SIEMENS

iQ300, Wall-mounted cooker hood, 90 cm, Matt black LC95BCC60B





- ✓ Matt Black finish: Modern coating with fewer visible fingerprints.
- ✓ Pleasantly quiet motor: Quietly powerful motor for efficient ventilation.
- ✓ Pushbutton control: Simple and intuitive control of your hood settings.
- ✓ Illuminate your cooking space with LED lights for optimal visibility and ambience setting.
- ✓ Dual-filter system: Two filters remove grease, vapours, and strong odours.

Optional accessories

LZ11FBI16	Long-life Clean Air recirculation kit
LZ11FBK62	Chimney extension 1000 mm
LZ31XXE11	reducer
LZ31XXH12	backpressure flap standard

Features

Technical Data

Typology: ..... Wall-mounted
Length electrical supply cord: ..... 130 cm
Height of the appliance: ..... 60 mm
Minimum distance above an electric hob: ..... 550 mm
Minimum distance above a gas hob: ..... 650 mm
Weight: ..... 14.0 kg
Control panel: ..... Mechanical
Number of speed settings: 3
Maximum output air extraction: ..... 594 m³/h
Maximum output recirculating air: ..... 569 m³/h
Maximum Air flow: ..... 594 m³/h
Number of lights: 2
Noise level: ..... 67 dB(A) re 1 pW
Diameter of air outlet: ..... 150 mm
Grease filter material: ..... Washable stainless steel
EAN code: 4242003976319
Connection Rating: ..... 200 W
Nominal power: ..... 220-240 V
Frequency: ..... 50; 60 Hz
Plug type: ..... GB plug
Installation type: ..... Wall-mounted

4 242003 976319

SIEMENS

iQ300, Wall-mounted cooker hood, 90 cm, Matt black
LC95BCC60B

Features

Design:
- Box design
- wall-mounted
- Suitable for ducted and re-circulating operation

Core Features:
- Capacitor energy efficient
- 2 x LED 1.5W
- Colour Temperature: 3500 K
- Light Intensity: 265 lux
- 3 metal grease filter(s).

Comfort Features:
- Push button control for extractor speeds and light
- 3 x power levels

Cleaning Comfort:
- Easy to clean smooth surfaces and materials.
- Steel filter cover dishwasher-safe
- Coated surfaces for less fingerprint sensitivity

Exhaust Mode:
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
- Speed 1: extraction rate 361 m3/h; noise level 57 dB(A) re1pW
- Speed 2: extraction rate 469 m3/h; noise level 63 dB(A) re1pW
- Speed 3: extraction rate 594 m3/h; noise level 67 dB (A) re1pW
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 72 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

Recirculation Mode:
- The Long-life Clean Air odour filter absorbs intense odours, such as fish, as well as pollen. The lifetime can be extended up to 4 times by refreshing the filter in the oven
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Long-life Clean Air recirculation kit (available as optional accessory):
- Speed 1: extraction rate 360 m3/h; noise level 60 dB(A) re1pW
- Speed 2: extraction rate 477 m3/h; noise level 67 dB(A) re1pW
- Speed 3: extraction rate 569 m3/h; noise level 71 dB (A) re1pW

Technical Information and Sustainability:
- Consumption data:
- Power rating: 200 W
- Voltage: Nominal voltage: 220 - 240 V
- Sustainability:
- Made in Germany
- Available Long-life Clean Air odour filter with extended lifetime up to 4 times


Planning and Installation Information:
- Reduced assembly effort thanks to the easy installation method
- Dimensions exhaust air (HxWxD): 635-895 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 803-1080 x 898 x 500 mm
- Diameter pipe Ø 150 mm
- Electrical cable length 1.3 m

SIEMENS

iQ300, Wall-mounted cooker hood, 90 cm, Matt black
LC95BCC60B

Dimensioned drawings


Measurements in mm

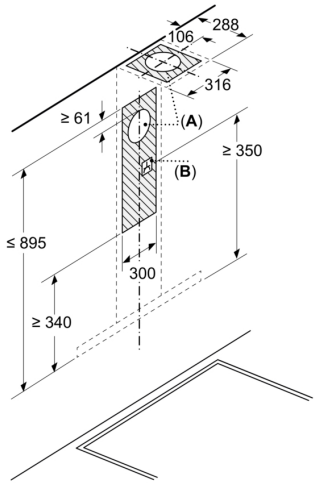

A: Exhaust air

B: Electrical connection

Measurements in mm
Wall installation with chimney

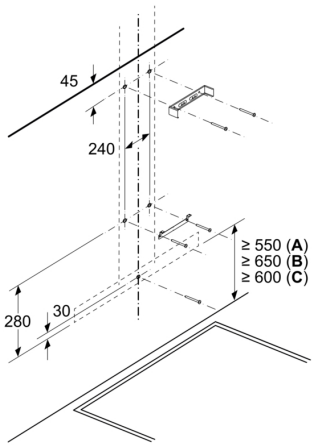


A: Electric


B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

Measurements in mm
Appliance in exhaust air mode

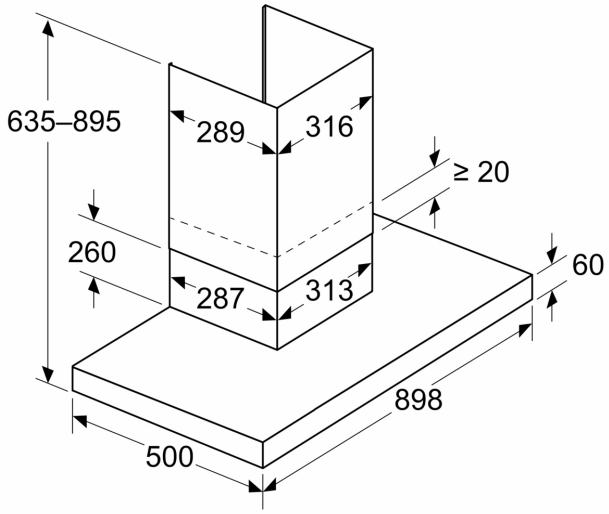

Measurements in mm
Recirculation perspective



Recirculation mode with recirculation kit (the recirculation kit is only available as a separate accessory)

SIEMENS

Dimensioned drawings

Measurements in mm
Wall panel depth

