Organico - Boiling Water & Filter Tap

Brushed Brass


Product Basics:



note: model shown may not be displayed in the finish as described

Product code	PT3025
EAN 13 barcode	5060879998711
Specification version	0 22/01/2026
Finish	Brushed Brass
Notes:	

Product drawing & dimensions:

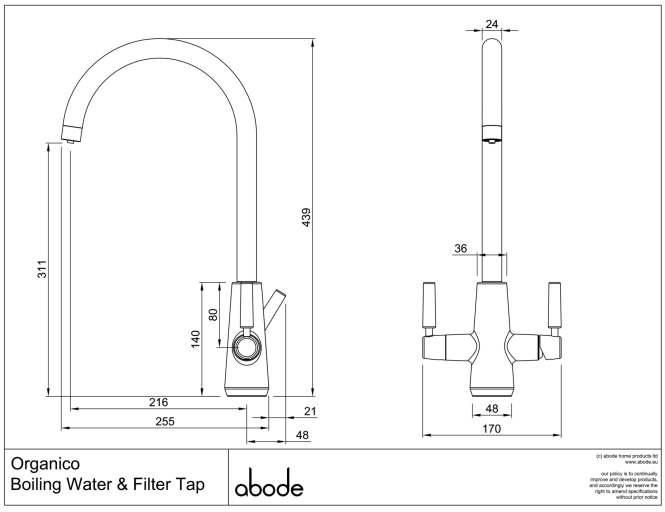

Overall Product Length (mm) (typically left to right dimension of product)	170
Overall Product Width (mm) (typically the rear of the base plinth to the end of the spout)	255
Overall Product Height (mm) (typically from base of tap to top of spout)	439
Spout Exit Height (mm) (typically from the base of the tap to the underside of the aerator)	311
Spout Exit Height (Maximum mm) (typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)	
Spout Exit Reach (mm) (typically from the centreline of the tap hole to the centre of the aerator)	216
Spout Exit Reach (At Maximum mm) (typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)	
Base Diameter (mm) (typically the diameter of the base plinth or the size of the wall plate)	48
Handle Back Projection (mm) (typically the distance from the centre of the taphole to the furthest point backwards of the lever when rotated)	48
Tap Hole or Mounting Holes Size (mm) (min. & max. mounting hole size)	35mm diameter
Tap Hole Centre Spacing (mm) (recommended distance between tap holes)	
Fixing range (mm) (min – max surface fixing depth)	0 - 50
Recommended Hole size (wall mounted products only)	48

Packing summary:

· Packaging Type: Boxed

· Packaged size LxWxD: 580x370x450

· Gross weight (ea): 9.195Kg

Warranty summary:

Details of Warranty duration and Terms & Conditions for each product type can be found on our website:
abodedesigns.co.uk/support/warranty

Certrain products may benefit by registering the Warranty here:
abodedesigns.co.uk/support/register/warranty

Care summary:

· Clean the mixer regularly as required, using a mild soap, do not use any other cleaners.

· After cleaning rinse thoroughly with clean water to remove any cleaner residue.

· Avoid contact with any harsh chemical or abrasives, for more detail see supplied booklet or www.abodedesigns.co.uk


· Regular tank cleaning & filter replacement will prevent the build-up of lime scale and dirt.

22/01/2026 - This sheet is a summary of the product information full details are available on request, errors & omissions excepted. © www.abodedesigns.co.uk

Features:

Delivers filtered water?	Delivers filtered 98°C water?	Has a spray function?	Has a Pull around (semi pro) function?	Product is flow limited?	Product is DDA compliant?
Yes	Yes	x	x	Yes	Yes

Flow characteristics:

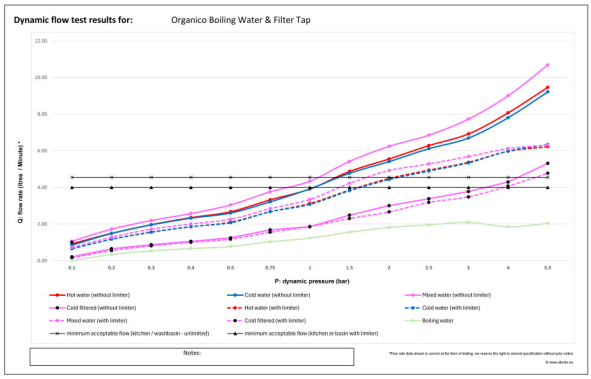

Min. cold water pressure (bar)	1.5
Min. hot water pressure (bar)	1.5
Max. water pressure (bar)	5.5
Max. flow at 3 bar (l/m)	5.68

General notes on pressures / flow:

2.0 bar hot & cold pressure requirted if optional flow limiter is installed

Flow Limiter:

Max. Design Flow limit	Flow limiter (USG/LPM)	Flow limiter Location
5.68	L/M	supplied bagged & separately (customer option to install in base of spout)

Spout:

Flow characteristics	Spout Rotation Range (°)	Spout End Connection (spout end threading)
dual flow (98°C water in centre channel, all other sources share outer tube)	180	m22 male

Connections:

Function	Type	Inlet connection	Outlet connection	Overall Length	Check valve included?	Other information
Hot Water Inlet	Flexible Stainless Braided Hose	1/2" BSP Female	M8	450		1/2"F supplied with captive rubber seal
Cold Water Inlet	Flexible Stainless Braided Hose	1/2" BSP Female	M8	450		1/2"F supplied with captive rubber seal

Filtration:


Filter Type	Filter media	Filter reorder code
Abode Hard Water Optimisation	Dealk Ion exchange & Granular Activated Carbon	PT1206



Filter features:

- Included with every PB3X system
- Filtered drinking water, designed specifically to suit boiling water applications
- Recommended replacement interval 6 months (depending upon use and water quality)
- Chlorine taste, sediment and odour reduction
- Scale reduction for better drinks and tank protection
- Easy replacement filter fittings



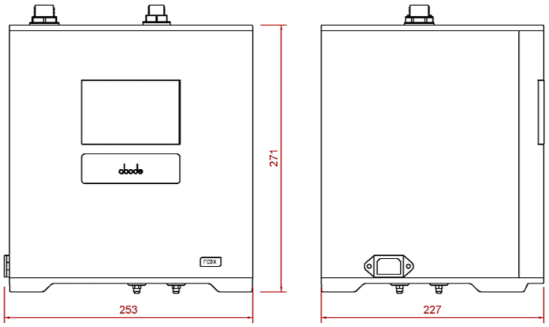

Boiler features:

- Digital adjustable tank temperature range 75, 85 , 90-98°C
- Touch screen control
- 3 Litre capacity tank, ~11 minutes reboil after (3L) use
- High grade 316 stainless steel tank
- On screen adjustable filter life & descale indicators
- Energy saving tank insulation and power saving modes
- Intelligent self-diagnostic control
- No external drain connection needed for a simplified, compact and more flexible installation
- Flow limited to 2 litres/min to limit splashing and ensure a smooth flow
- Tool free, hand tighten connectors to speed up installation, maintenance and descaling
- Compact size 253x227x271cm fits under apron front sinks
- Boost to temperature function



The complete package:

- Every system includes, PB3X boiler, hard water filter and a choice of stylish boiling water taps.
- Comprehensive installation and user guides
- UK Based customer service, with installation, maintenance and service support
- Filter reminder service, care packages and subscription savings available

22/01/2026 - This sheet is a summary of the product information full details are available on request, errors & omissions excepted. © www.abodedesigns.co.uk