# Oxbury - Boiling Water & Filter Tap

Dark Bronze


## Product Basics:



note: model shown may not be displayed in the finish as described

| | |
|---|---|
| **Product code** | PT3038 |
| **EAN 13 barcode** | 5060879998841 |
| **Specification version** | 0<br>22/01/2026 |
| **Finish** | Dark Bronze |
| **Notes:** | |

## Product drawing & dimensions:

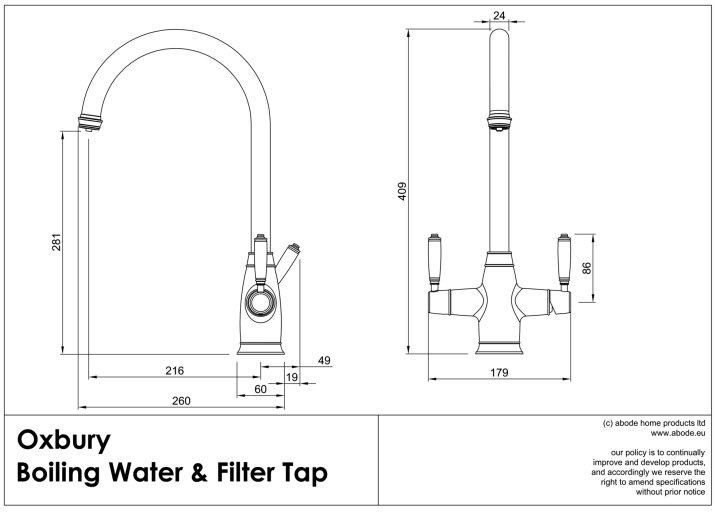


| | |
|---|---|
| **Overall Product Length (mm)**<br>(typically left to right dimension of product) | 179 |
| **Overall Product Width (mm)**<br>(typically the rear of the base plinth to the end of the spout) | 259 |
| **Overall Product Height (mm)**<br>(typically from base of tap to top of spout) | 409 |
| **Spout Exit Height (mm)**<br>(typically from the base of the tap to the underside of the aerator) | 281 |
| **Spout Exit Height (Maximum mm)**<br>(typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts) | |
| **Spout Exit Reach (mm)**<br>(typically from the centreline of the tap hole to the centre of the aerator) | 216 |
| **Spout Exit Reach (At Maximum mm)**<br>(typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts) | |
| **Base Diameter (mm)**<br>(typically the diameter of the base plinth or the size of the wall plate) | 60 |
| **Handle Back Projection (mm)**<br>(typically the distance from the centre of the taphole to the furthest point backwards of the lever when rotated) | 49 |
| **Tap Hole or Mounting Holes Size (mm)**<br>(min. & max. mounting hole size) | 35mm diameter |
| **Tap Hole Centre Spacing (mm)**<br>(recommended distance between tap holes) | |
| **Fixing range (mm)**<br>(min – max surface fixing depth) | 0 - 50 |
| **Recommended Hole size**<br>(wall mounted products only) | 49 |

## Packing summary:

· Packaging Type: Boxed

· Packaged size LxWxD: 580x370x450

· Gross weight (ea): 9.392Kg

## Warranty summary:

Details of Warranty duration and Terms & Conditions for each product type can be found on our website:
abodedesigns.co.uk/support/warranty

Certrain products may benefit by registering the Warranty here:
abodedesigns.co.uk/support/register/warranty

## Care summary:

· Clean the mixer regularly as required, using a mild soap, do not use any other cleaners.

· After cleaning rinse thoroughly with clean water to remove any cleaner residue.

· Avoid contact with any harsh chemical or abrasives, for more detail see supplied booklet or www.abodedesigns.co.uk


· Regular tank cleaning & filter replacement will prevent the build-up of lime scale and dirt.

05/02/2026 - This sheet is a summary of the product information full details are available on request, errors & omissions excepted. © www.abodedesigns.co.uk

## Features:

| Delivers filtered water? | Delivers filtered 98°C water? | Has a spray function? | Has a Pull around (semi pro) function? | Product is flow limited? | Product is DDA compliant? |
|---|---|---|---|---|---|
| Yes | Yes | x | x | x | Yes |

## Flow characteristics:

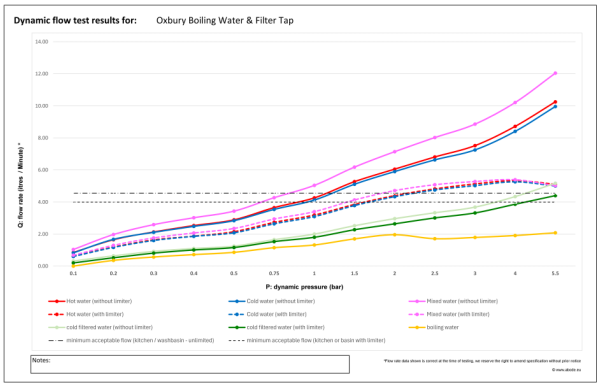


| | |
|---|---|
| **Min. cold water pressure (bar)** | 1.5 |
| **Min. hot water pressure (bar)** | 0.85 |
| **Max. water pressure (bar)** | 5.5 |
| **Max. flow at 3 bar (l/m)** | 5.28 |

**General notes on pressures / flow:**

## Flow Limiter:

| Max. Design Flow limit | Flow limiter (USG/LPM) | Flow limiter Location |
|---|---|---|
| 5.68 | L/M | supplied bagged & separately (customer option to install in base of spout) |

## Spout:

| Flow characteristics | Spout Rotation Range (°) | Spout End Connection (spout end threading) |
|---|---|---|
| dual flow (98°C water in centre channel, all other sources share outer tube) | 180 | m22 male |

## Connections:

| Function | Type | Inlet connection | Outlet connection | Overall Length | Check valve included? | Other information |
|---|---|---|---|---|---|---|
| **Hot Water Inlet** | Flexible Stainless Braided Hose | 1/2" BSP Female | M8 | 450 | | 1/2"F supplied with captive rubber seal |
| **Cold Water Inlet** | Flexible Stainless Braided Hose | 1/2" BSP Female | M8 | 450 | | 1/2"F supplied with captive rubber seal |

## Filtration:


| Filter Type | Filter media | Filter reorder code |
|---|---|---|
| Abode Hard Water Optimisation | Dealk Ion exchange & Granular Activated Carbon | PT1206 |




**Filter features:**

- Included with every PB3X system
- Filtered drinking water, designed specifically to suit boiling water applications
- Recommended replacement interval 6 months (depending upon use and water quality)
- Chlorine taste, sediment and odour reduction
- Scale reduction for better drinks and tank protection
- Easy replacement filter fittings

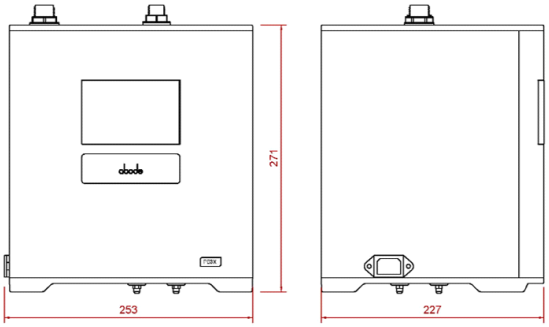


**Boiler features:**

- Digital adjustable tank temperature range 75, 85 , 90-98°C
- Touch screen control
- 3 Litre capacity tank, ~11 minutes reboil after (3L) use
- High grade 316 stainless steel tank
- On screen adjustable filter life & descale indicators
- Energy saving tank insulation and power saving modes
- Intelligent self-diagnostic control
- No external drain connection needed for a simplified, compact and more flexible installation
- Flow limited to 2 litres/min to limit splashing and ensure a smooth flow
- Tool free, hand tighten connectors to speed up installation, maintenance and descaling
- Compact size 253x227x271cm fits under apron front sinks
- Boost to temperature function



**The complete package:**

- Every system includes, PB3X boiler, hard water filter and a choice of stylish boiling water taps.
- Comprehensive installation and user guides
- UK Based customer service, with installation, maintenance and service support
- Filter reminder service, care packages and subscription savings available

05/02/2026 - This sheet is a summary of the product information full details are available on request, errors & omissions excepted. © www.abodedesigns.co.uk