

Product Finish: Brushed Nickel

Product code: AT1261
EAN13 barcode: 5060344153690



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product features:


- Metal construction throughout
- Supplied complete with flexible tail pipes for fast simple fitting
- Single lever control for effortless single handed control
- Grey nylon spout hose for stylish durability
- Antisplash spout supplied as standard

Additional information / Parts included:

The installation of this product should respect requirement IRN R090.

Includes triangular stabilising bracket - sco06054 kit, lead hose weight, 2 x green fibre washers 15mm OD, 3/8" male x 1/2" female adaptors

Product dimensions:

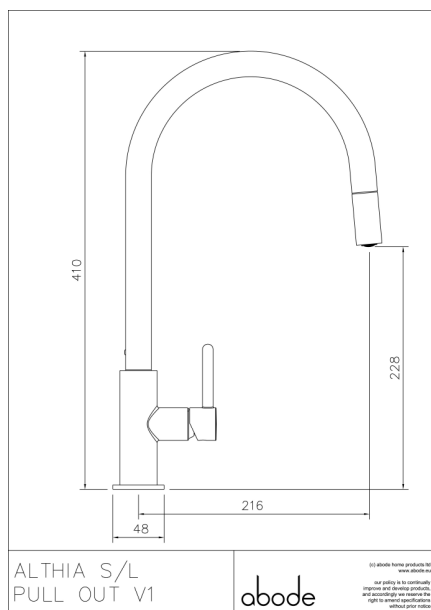

- **Overall Height / projection:** 410 mm
- **Exit reach:** 216 mm
- **Exit height:** 228 mm
- **Centre distance(s):**


- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 55 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** M21.5x1

Packaged properties:

Box length: 575mm	Box depth: 80mm
Box width: 350mm	Units per outer: 5
Tap only weight: 2.25kg	Boxed weight: 0.63kg

Product flow characteristics:

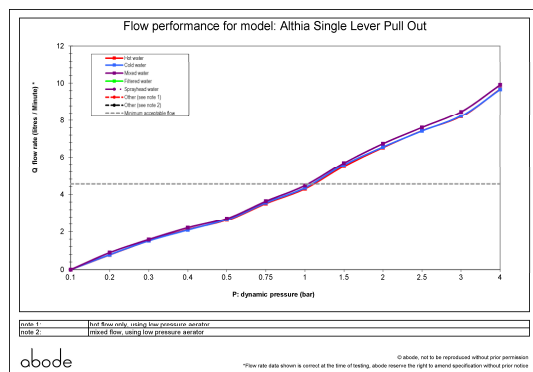

- **Min / Max water pressure:** 1.00 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 08.50

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Integral to sprayhead, Hot and Cold (Separate)

- **Aerator type:** Honeycomb coin slot aerator
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M8 / 3/8" BSP Female (including 3/8" bsppm x 1/2" bspp adaptors)

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year